




ABSORBEDORES DE  
ENERGÍA  
ENERGY  
ABSORBERS

## 53 ARBORICULTURA SIMPLE



<p><b>Aplicación</b> Application</p>	<p><b>Autoaseguramiento (EN 355 CE )</b></p> <p>Componente indispensable para formar un sistema anticaídas seguro. Está diseñado para poder abrazar la estructura sin tener que estrangular la cinta. Ofrece una gran versatilidad al poder acortar o extender la longitud del elemento de amarre. Su especial diseño asegura una fuerza de frenado inferior a 6 kN y una distancia de parada máxima inferior a 4,75 m.</p>	<p>Self-insurance (EN 355 CE )</p> <p>The Climax energy absorber model 53 BUCLES is an indispensable part of a safe fall-protection system. In the event of a fall, this part progressively absorbs its kinetic energy, preventing the impact of the fall from ever exceeding 6kN. Designed to be used in belay techniques at structure. Its design enables you to embrace the structure without having to strangle the polyester tape. It offers great versatility, as the length of the tether can be shortened or lengthened.</p>
------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p><b>Características</b> Characteristics</p>	<p><b>Incluye:</b></p> <ul style="list-style-type: none"> <li>- 1 conectores modelo PCX-001 (diámetro de abertura 24 mm)</li> <li>- 1 conector modelo 32 (diámetro de abertura de 18 mm)</li> </ul> <p>Incorpora maillon para la sustitución de elementos de amarre. Varias medidas disponibles. Banda de amarre fabricada con hilado de fibra sintética con un ancho nominal de 19 mm.</p>	<p><b>Includes:</b></p> <ul style="list-style-type: none"> <li>- 1 Climax PCX-001 scaffolding hooks (gate opening 54 mm)</li> <li>- 1 Climax 32 scaffolding hook (gate opening 18 mm)</li> </ul> <p>Quick link included for lanyard replacement. Many measures availables.</p>
---------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

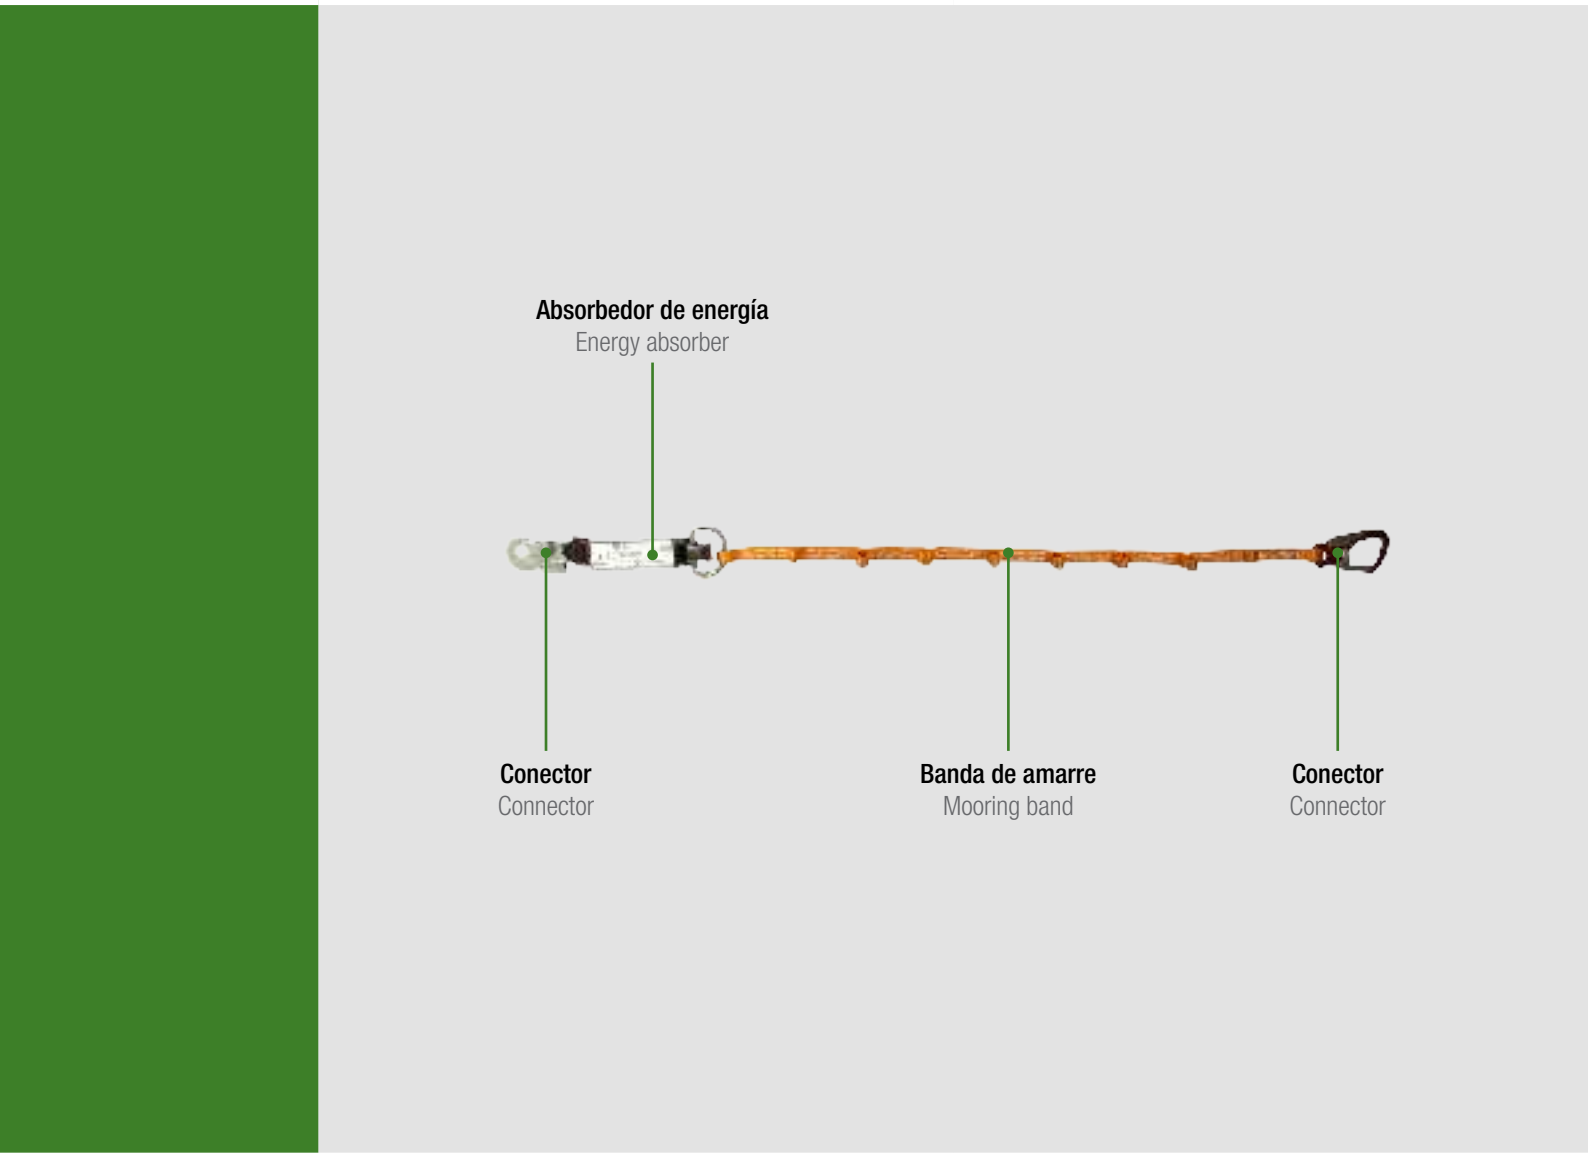

<p><b>Ensayos / Certificación CE</b> Test / CE Certification</p>	<p><b>Normativa: EN 355: 2002</b> <b>Exigencias de salud y seguridad del R. D.1407/1992.</b> <b>Organismo de control notificado: 0321</b></p>	<p><b>Normative:</b> EN 355: 2002 + VG 11 PFE 63 (Additional static test). Health and safety requirements of R.D.1407/1992 Body control number: 0321</p>
----------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p><b>Última actualización: 02/2018</b></p>	<p>Last update: 02/2018</p>
---------------------------------------------	-----------------------------